


QUICK INSTALLATION GUIDE

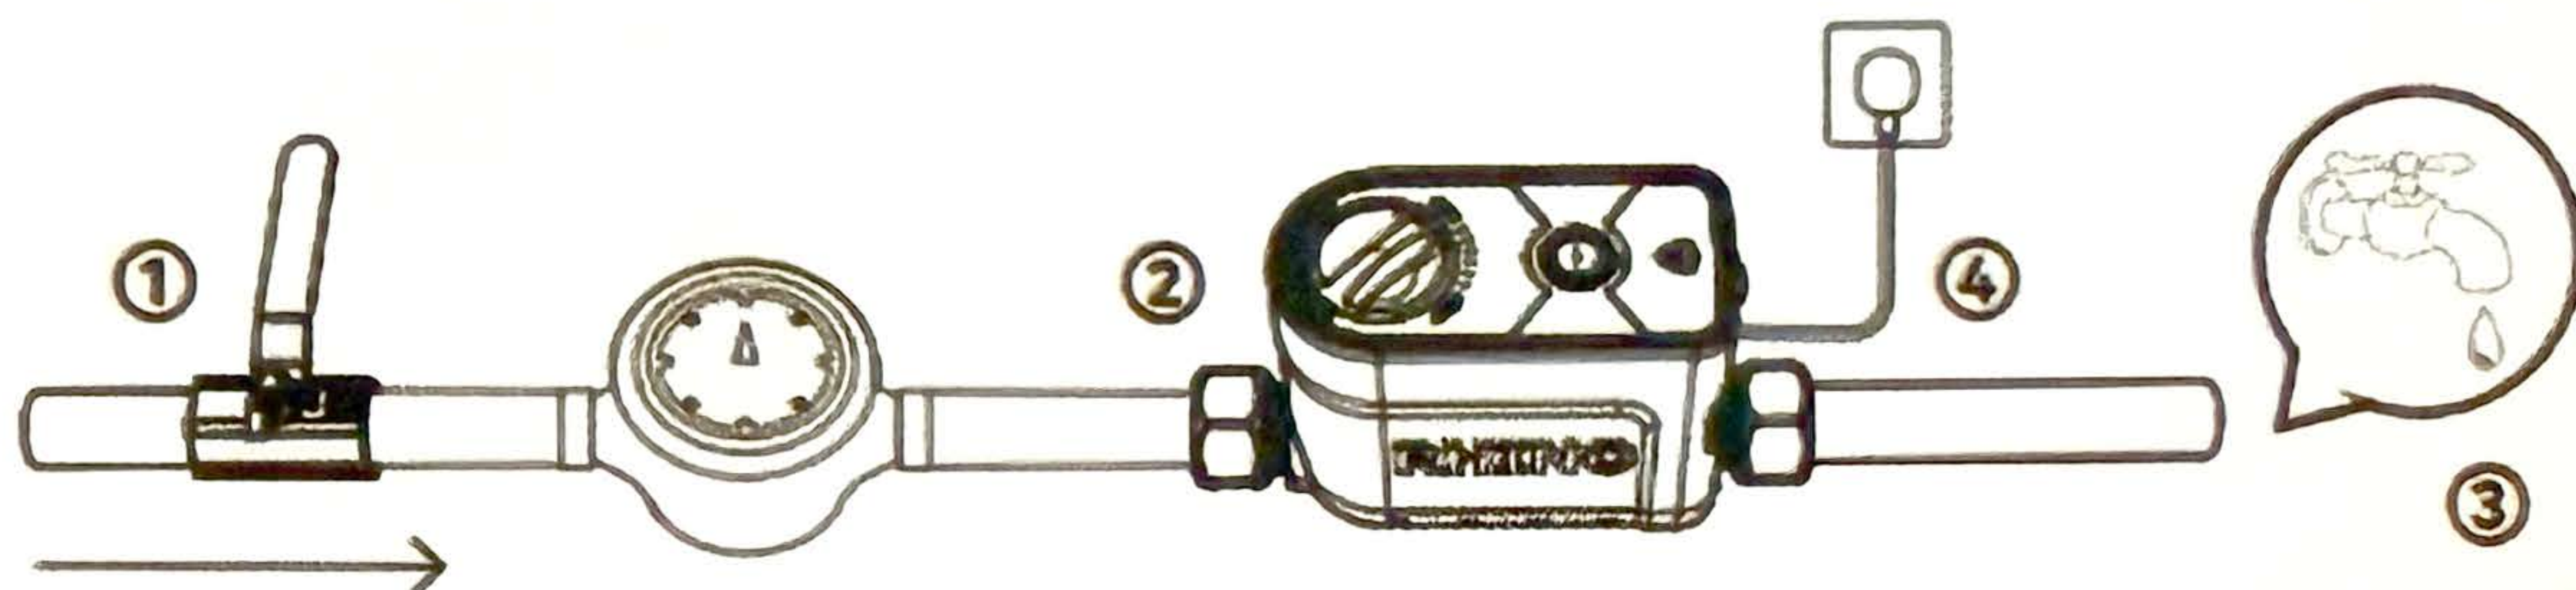

Step1: Turn off the main water valve.①

Step2: The installation location of the device needs to be at the back end of the water meter.②

Step3: Ensure that the end of the cut pipe is drained of water.③

Step4: Installing the device, power on the DC12V(Please install a 9V backup battery as well).④

(At this point,the device will active the self-test function. It will automatically close the valve first then turn it on again. This process will last for two minutes, please be patient, DO NOT touch the device during this process.)

(If the Rotary knob is still in the closed position after two minutes, manually turn the knob to the open position to ensure that the device is in the open valve state.)

Step5: Last step, open the main water valve until the pipeline is filled with water.⑤

The installation requires a professional plumber to complete or have it installed under the guidance of a professional.

